



Triace A310 Disk Brake Replacement

This repair guide will demonstrate the correct way to repair or replace a disk brake.

Written By: Daniel



INTRODUCTION

In order to have a safer biking experience, make sure your disk brake is properly replaced.



TOOLS:

- [Modular Screw Driver](#) (1)
 - [T25 security bit for modular screw driver](#) (1)
-

Step 1 — Tire



- Begin loosening the tire by turning the quick release handle.

Step 2



- Gripping the rear derailleur, pull the arm back, away from the front of the bike.
- Notice how the derailleur becomes almost vertical in the second picture when compared to the first.

Step 3




- There should be enough slack, in the chain, at this point to remove the tire from the bike.
- ⓘ Note: You may need to wiggle the tire and chain around in order to create enough slack.
- Remove the tire from the bike.

Step 4 — Disk Brake



- Place the tire flat on the ground making sure the disk is facing you.


Step 5

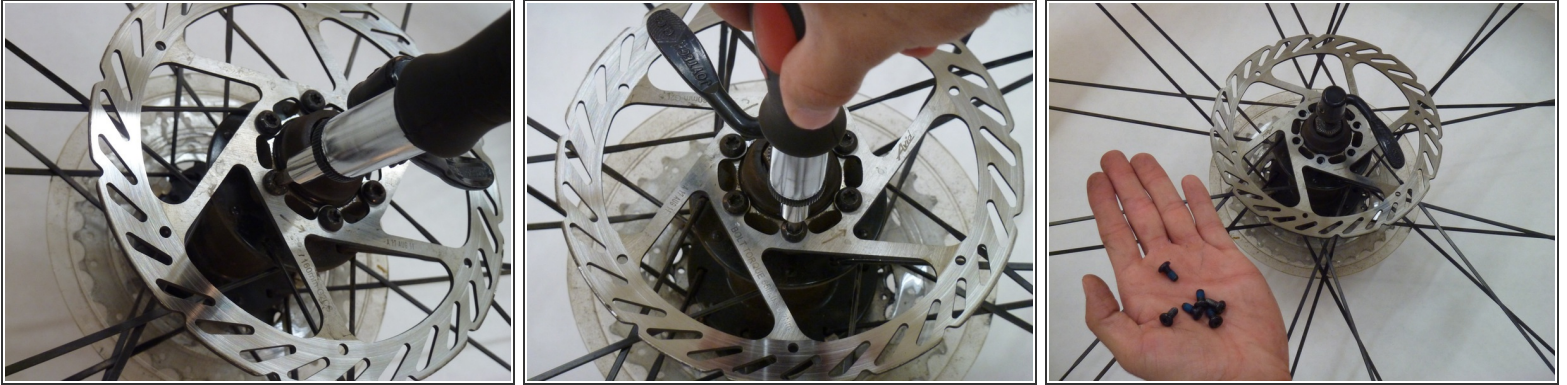

- Using the modular screw driver with a T25 bit, begin loosening and then removing the six 10mm-long screws.

☑ Make sure to keep track of all of the removed pieces.

Step 6

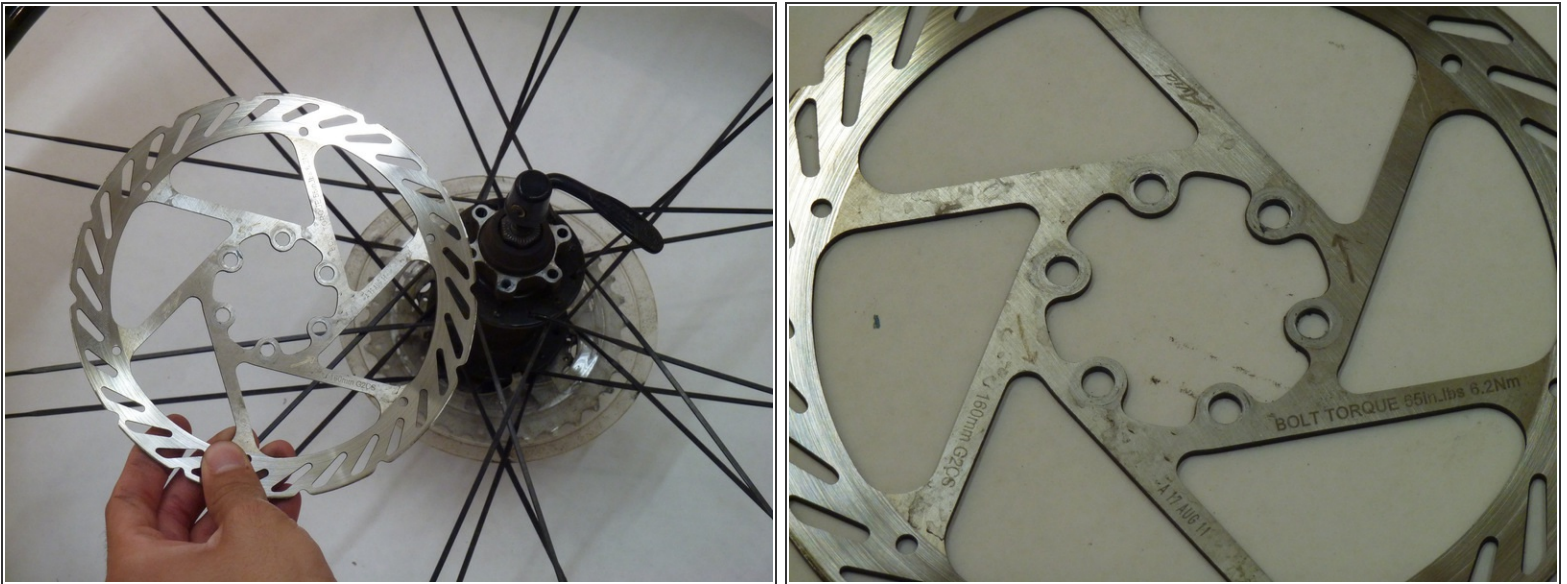

- After all of the screws have been removed, take the disk and pull it away from the tire.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 12:50:46 AM.